

NATIONAL PETROLEUM COMPANY- NPC


AMMAN JORDAN
TENDER NO. 17/2021/C
Schedule of specifications and prices

SUBJECT: CHOKE MANIFOLD

GROUP : I

| Item No. | DESCRIPTIONS | UNIT | QTY | W/O CUSTOMS & TAXES | |
|----------|--|------|-----|--|-------------|
| | | | | C & F : AQABA PORT THEN TO RISHA WAREHOUSE | |
| | | | | Unit price | Total Price |
| 1- | 3-1/8" CHOKE AND KILL MANIFOLD FOR SOUR GAS WELL DRILLING AS API SPEC 6A, PR-1, PSL-3, MATERIAL CLASS EE, TEMPRATURE RATING P/U, CONSIST OF THE FOLLOWING : TWELVE (12) 3-1/8" ,5000 PSI WP MANUAL GATE VALVES WITH R-35 FLANGED ENDS. ONE (01) 4-1/16" ,5000 PSI WP MANUAL GATE VALVE WITH R-39 FLANGED ENDS. ONE (01) 3-1/8" , 5000 PSI WP MANUAL ADJUSTABLE CHOKE. ONE (01) 3-1/8", 5000 PSI WP MANUAL POSITIVE CHOKE. ONE (01) 7-1/16" ID x 9-1/4" OD 5000 PSI WP BUFFER CHAMBER WITH SIX (6) 3-1/8" INLETS & OUTLETS. THREE (03) ADAPTER 3-1/8" FLANGE x 2" UNION FIG 1502 FEMALE CONNECTION. ONE (01) INSTRUMENT FLANGE 5000 PSI WP . ONE (01) PRESSURE GUAGE 0-6000 PSI 2" LPT CONNECTION INSTALLED ON INSTRUMENT FLANGE. 6" DIAL READING FACE WITH LIQUID FILLED. ALLOY 625 INLAID RING GROOVES COLOR: RAL 3001 (RED) XYLAN COATED STUDS AND NUTS ASSEMBLED COMPLETE WITH STUDDED BLOCKS, SPOOLS, FLANGES, STUDS AND NUTS WITH ALL API RING GASKET. EQUIPMENT FOR LAND USE IN ALL WEATHER CONDITIONS. MOUNTED ON NON ADJUSTABLE HEAVY DUTY OILFIELD SKID WITH 4 NOS LIFTING PAD EYES . | SET | 1 | | |
| 1.1 | BEAN 16/64 FOR ABOVE POSITIVE CHOKE | EA | 1 | | |
| 1.2 | BEAN 24/64 FOR ABOVE POSITIVE CHOKE | EA | 1 | | |
| 1.3 | BEAN 32/64 FOR ABOVE POSITIVE CHOKE | EA | 1 | | |
| 1.4 | BEAN 48/64 FOR ABOVE POSITIVE CHOKE | EA | 1 | | |
| 1.5 | BEAN 64/64 FOR ABOVE POSITIVE CHOKE | EA | 1 | | |
| | | | | TOTAL | |

| | |
|--|--------------------|
| CURRENCY: | MODE OF PAYMENT : |
| DELIVERY PERIOD : | PLACE OF DELIVERY: |
| VALIDITY : | BANK GUARANTEE : |
| MANUFACTURER: | ORIGIN OF GOODS : |
| DATE OF MANUFACTURING : | |
| SPECIAL CONDITIONS: | |
| THE PRODUCT MUST BE MANUFACTURED IN ACCORDING TO API SPEC 6A. | |
| THE PRODUCT SHOULD BE BRAND NEW AND PRESSURED TESTED. | |
| THE OFFERS SHOULD CONTAIN ALL API VALID CERTIFICATIONS. | |
| THE BIDDERS ARE REQUIRED TO SUBMIT THE DETAILS DIAGRAM OF THE PRODUCT. | |
| THE CHOKE CONFIGRATION SHOULD BE AS CHEMATIC DIAGRAM ENCLOSED. | |
| THE MANUFACTURER SHOULD BE SPECIALIZED IN CHOKE MANIFOLD INDUSTRY AT LEAST FOR 15 YEARS. | |
| THE OFFER, DIAGRAMS AND CERTIFICATIONS SHOULD BE FOR THE SAME MANUFACTURER. | |
| THE BIDDERS SHOULD SUBMIT THE MANUFACTURER PROFILE. | |
| THE SUPPLIER SHOULD SHIP THE USER MANUAL WITH THE PRODUCT. | |
| ALL COLUMNS AND BLANK MUST BE FILLED IN AND IT'S THE NPC CHOICE TO CHOOSE THE PRICE WHICH SUITS IT'S REQUIREMENT | |

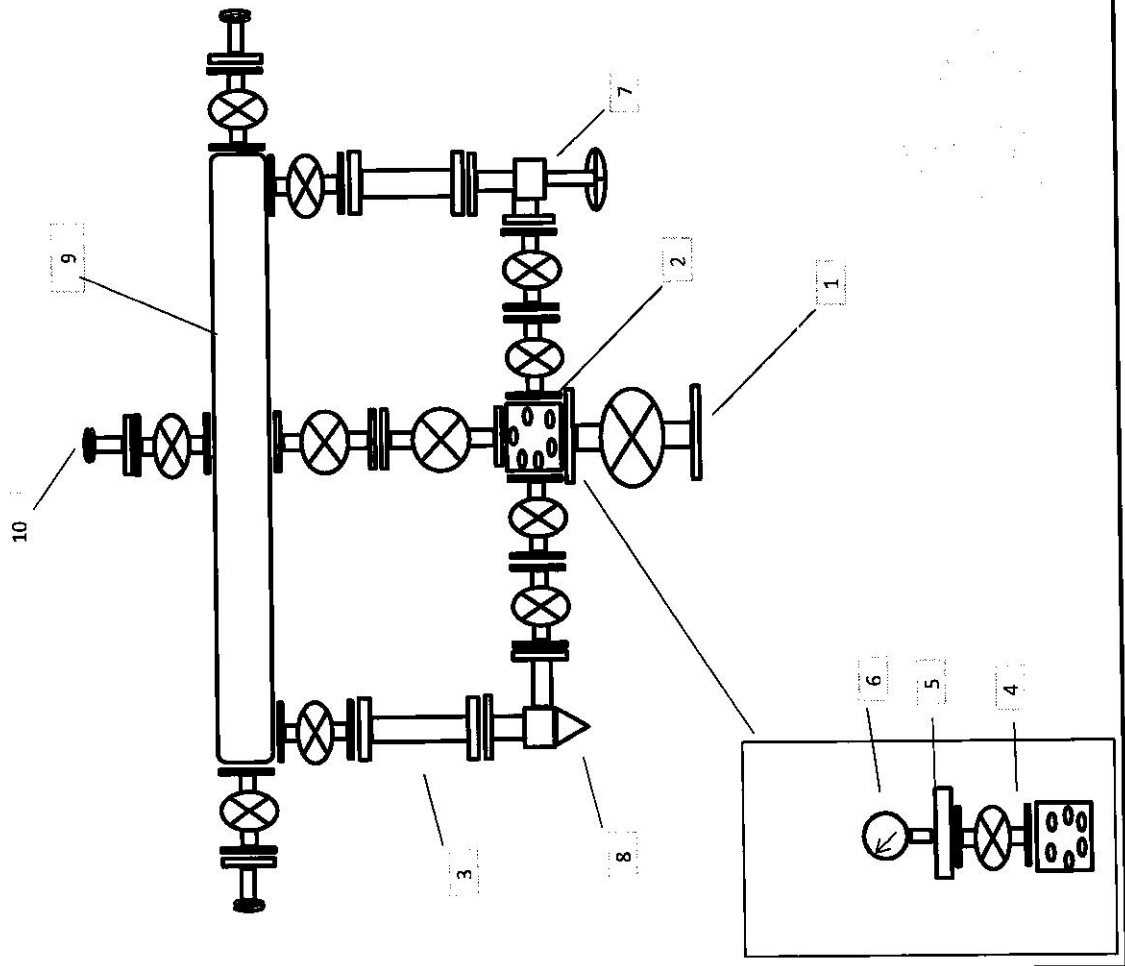

| index | description | qty |
|-------|---|-----|
| 1 | 4-1/16" manual gate valve | 1 |
| 2 | 5 ways studed cross 4-1/16" x 3-1/8" x 3-1/8" x 3-1/8" x 3-1/8" 5000 psi WP | 1 |
| 3 | 3-1/8" spacer spool 5000 psi WP | 2 |
| 4 | 3-1/8" manual gate valve 5000 psi WP | 12 |
| 5 | instrument flange 5000 psi WP | 1 |
| 6 | 0-6000 flanged pressure gage | 1 |
| 7 | 3-1/8" manual adjustable choke | 1 |
| 8 | 3-1/8" positive choke 5000 psi WP | 1 |
| 9 | 7-1/16" x 9-1/4" buffer chamber 5000 psi WP | 1 |
| 10 | adapter 3-1/8" flange x 2" hummer union female thread FIG 1502 | 3 |
| 11 | SKID BASE | 1 |

| PRODUCT SPECIFICATIOS FOR SOUR GAS WELL | |
|---|-------------------------------------|
| a | WORKING PRESSURE : 5000 PSI |
| b | PERFORMANCE REQUIRED : PR-1 |
| c | PRODUCT SPECIFICATION LEVEL : PSL-3 |
| d | MATERIAL CLASS: EE |
| e | TEMPERATURE RATING : P/U |

C. J. [Signature]